



### **TRAILERS**



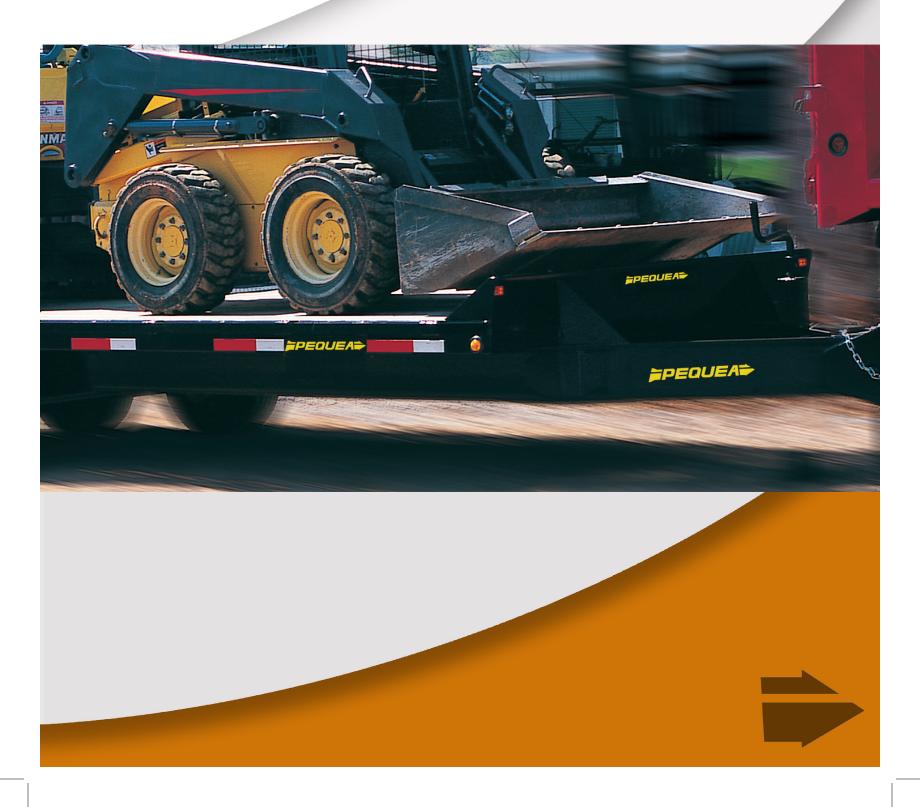



### Design

Engineered from the axles up for strength, durability, and simplicity. Pequea trailers are designed to work as hard as you do. Built with the professional user in mind Pequea trailers can stand up to the rigors of the jobsite and last for the long haul.



### Construction


Our welders and machinists are proud of their work. Pequea trailers are are made from fully welded structural steel, assembled and welded in fixtures and jigs for repeatable quality. Using the best components from axles to couplers we know a trailer is only as strong as its weakest link.



### Detail

Finished to endure life on the road. Our paint process includes: Cleaning, etching, dry oven, epoxy priming, two component urethane top coat, and flash oven. Wire harnesses are sealed and modular using LED lights. Lumber for decking as well as any other components used are chosen for their durability and quality.





### Contents





Page 28



### 7" Channel Skidsteer Trailers




10-000lb GVWR	12 000 GVWR	14,000 GVWR	16.000 GVWR

	- /	,	<b>/</b>	- /	
Overall Width	102"				
Deck Width		81"	3/4		
Deck Length		Available in 14	4', 16', 18', 20'		
Deck Height		19	.5"		
Overall Height		32	2"		
Axles	(2) Dexter 6K 6 Bolt (2) Dexter 6K 8 Bolt (2) Dexter 7K 8 Bolt (2) 8K 8 Bolt				
Suspension		Slipper Le	af Springs		
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 16"	8 Bolt 17.5"	
Tires	225/75 D15	235/80 R16	235/80 R16	235/75 R17.5 LRH	
Hitch	Adj. 2 5/16" Ball Coupler (Optional Pintle)				
Jack	7,000 lb. Drop Leg 10,000 lb. Drop Leg				
Brakes	Standard- Both Axles				
Weight	14' = 2	,200 lbs (Add 100 lbs fo	or every additional foot o	f deck)	

Made with





### 7" Channel Skidsteer Trailers




10° Loading Angle (wih 6' Ramps)



LED Lights (Standard on all Pequea Trailer)



**10K Drop Leg Jack**Standard with any GVWR Upgrade



81-3/4" Deck Width



**D-Rings (Option)** Standard on 16,000 GVWR Model





## T200 Tilt Trailer 4' Stationary + 16' Gravity Tilt Deck



	10,000lb GVWR	12,000 GVWR	14,000 GVWR	16,000lb GVWR		
Overall Width		102	2"			
Deck Width		81-3	/4"			
Deck Length		4' Stationary Deck	+ 16' Tilting Deck			
Deck Height		19-1	/2"			
Main Frame		7" x 9.8 lb Struc	tural Channel			
Axles	(2) Dexter 6K 6 Bolt	(2) Dexter 6K 8 Bolt	(2) Dexter 7K 8 Bolt	(2) 8K 8 Bolt		
Suspension		Slipper Leaf Springs				
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 16"	8 Bolt 17.5"		
Tires	225/75 D15	235/80 R16	235/80 R16	235/75 R17.5 LRH		
Hitch	Adj. 2 5/16" Ball Coupler					
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg				
Brakes	Standard- Both Axles					
Weight		3,250 lbs				







Simple Latching Mechanism





Diamond Plate Knife Edged Tail



(6) D-Rings Standard



**Hydraulic Cushioned Gravity Tilt** (No Power Required)



4' Stationary Deck + 16' Tilt







## T100 Tilt Trailer 7" Channel Main Frame



	10,000lb GVWR	12,000 GVWR	14,000 GVWR	16,000 GVWR		
Overall Width		102	2"			
Deck Width		81-3	/4"			
Deck Length		18' Full Deck I	Hydraulic Tilt			
Deck Height		19-1	/2"			
Main Frame		7" x 9.8 lb Struc	tural Channel			
Axles	(2) Dexter 6K 6 Bolt	(2) Dexter 6K 8 Bolt	(2) Dexter 7K 8 Bolt	(2) 8K 8 Bolt		
Suspension		Slipper Lea	of Springs			
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 16"	8 Bolt 17.5"		
Tires	225/75 D15	235/80 R16	235/80 R16	235/75 R17.5 LRH		
Hitch	Adj. 2 5/16" Ball Coupler					
Jack	7,000 lb. Drop Leg	000 lb. Drop Leg 10,000 lb. Drop Leg				
Brakes	Standard- Both Axles					
Weight		2,850	lbs			





### T100/Tilt Trailer

7" Channel Main Frame



Toolbox with Hydraulic Power Unit



**Hydraulic Tilt** 



**Diamond Plate Tail** 



(6) D-Rings Standard



Front Tie Down Rail



Standard Duty
Deckover
5" Tube Main Frame





#### 7,000lb **GVWR**

#### 10,000 GVWR

	1,000	10,000 011111		
Overall Width	96"			
Deck Width	91"			
Deck Length	14' + 3' Beaver Tail (All Flat a	and Level Deck Optional)		
Deck Height	28"	30"		
Main Frame	5" x 2" x .188" Rec	ctangular Tube		
Axles	(2) Dexter 3.5K 5 Bolt	(2) Dexter 5K 6 Bolt		
Suspension	Slipper Leaf	Springs		
Wheels	5 Bolt 15"	6 Bolt 15"		
Tires	205/75 D15 225/75 D15			
Hitch	Adj. 2 5/16" Ball Coupler			
Jack	7,000 lb. Drop Leg			
Brakes	Standard Electric Brak	xes on Both Axles		
Weight	14' = 2400 lbs (Add 75 lbs for every additional foot of deck)			

Made with



# Formerly known as 716 Standard Duty Deckover 5" Tube Main Frame





3' Boarded Tail



**Heavy Duty Diamond Plate Fenders** 



5" x 2" x .188" Tubular Frame



LED Lights (Standard on all Pequea Trailers)









	10,000lb GVWR	12,000 GVWR	14,000 GVWR	
Overall Width		101"		
Deck Width		96"		
Deck Length	Ava	ilable in 16', 18', 20' (Plus 4'	Tail)	
Tail	Available with Bo	oarded Tail, Adjustable Tail, A	II Flat Extension	
Deck Height		31"		
Main Frame	7" x 9.8 lb Structural Channel			
Axles	(2) Dexter 6K 6 Bolt	(2) Dexter 6K 8 Bolt	(2) Dexter 7K 8 Bolt	
Suspension		Slipper Leaf Springs		
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 16"	
Tires	225/75 D15	235/80 R16	235/80 R16	
Hitch	Adj. 2 5/16" Ball Coupler			
Jack	7,000 lb. Drop Leg	10,000 lb	. Drop Leg	
Brakes	Standard- Both Axles			
Weight	16' = 3,400 lbs (Add 75 lbs for every additional foot of deck)			







4' Boarded Tail (Standard)



**Strongest Gooseneck in the Industry** 



Adjustable Beavertail with Slide-In Ramps (Optional)

4' Adjustable Beavertail with 5' Slide-In Ramps (Optional)





Formerly known as I-10

Commercial Duty
Deckover

10" Channel Main Frame



	14,000lb GVWR	16,000 GVWR	20,000 GVWR		
Overall Width		101"			
Deck Width		96"			
Deck Length	Availabl	e in 18', 20', 22', and 24' (Plu	us 5' Tail)		
Tail	Available with B	oarded Tail, Adjustable Tail, A	All Flat Extension		
Deck Height		32"			
Main Frame	1	10" x 15.3 lb Structural Channel			
Axles	(2) Dexter 7K 8 Bolt	(2) Dexter 8K 8 Bolt	(2) Dexter 10K 8 Bolt		
Suspension	Slipp	er Leaf Springs (Torsion Op	tional)		
Wheels	8 Bolt 16" 8 Bolt 17.5"				
Tires	235/80 R16	235/75 F	R17.5 LRJ		
Hitch	Adj. 2 5/16" Ball Coupler				
Jack		10,000 lb. Drop Leg			
Brakes		Standard- Both Axles			
Weight	18' = 5,200 lbs	18' = 5,200 lbs (Add 100 lbs for each additional foot of deck)			



# Commercial Duty Deckover 10" Channel Main Frame









### C2500 Dump Trailer

7" Channel Main Frame



	10,000lb GVWR 12,000 GVWR 14		14,000 GVWR		
Bed Length		12'			
Bed Width		6' 6"			
Bed Height		22" Off Ground			
Main Frame		7" x 9.8 lb Structural Channel			
Axles	(2) Dexter 6K 6 Bolt	(2) Dexter 6K 8 Bolt	(2) Dexter 7K 8 Bolt		
Suspension		Slipper Leaf Springs			
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 16"		
Tires	225/75 D15	235/80 R16	235/80 R16		
Hitch		Adj. 2 5/16" Ball Coupler			
Jack	7,000 lb. Drop Leg 10,000 lb. Drop Leg				
Brakes	Standard- Both Axles				
Weight	12' Bed = 4,100 lbs 14' Bed = 4,400 lbs				



### C2500 Dump Trailer

7" Channel Main Frame



Slide-In Ladder Ramps (Standard)



Slide-In Ladder Ramps (Standard)



**Barn Door/Spread Dump Gate (Standard)** 



Barn Door/Spread Dump Gate (Standard)



**Side Extensions & Tarp Kit (Option)** 



Gooseneck Hitch (Option)





# TPEQUEAT C1500 Dump Trailer 74" x 10' Box



GVWR	10,000 lb
Bed Length	10'
Bed Width	74"
Bed Height	26" Off Ground
Main Frame	5" x 6.7 lb Structural Channel
Axles	(2) Dexter 6K 6 Bolt Straight Axles
Suspension	Slipper Leaf Springs
Wheels	6 Bolt 15"
Tires	225/75 D15
Hitch	Adj. 2 5/16" Ball Coupler
Jack	7,000 lb. Drop Leg
Brakes	Standard- Both Axles
Weight	3,100 lbs

Made with



## C1500 Dump Trailer









## C500 Dump Trailer

60" x 8' Box



#### 2,999 lb GVWR

### 5,000 lb GVWR

	<b>_,</b>	- <b>,</b>		
Bed Length	8'			
Bed Width		62"		
Bed Height		24"		
Main Frame	7" x 9.8 lb S	tructural Channel		
Axles	(1) Dexter 3.5K 5 Bolt (1) Dexter 5.2K 5 Bolt			
Suspension	Shackle	Leaf Springs		
Wheels	5 Bolt 15"	6 Bolt 15"		
Tires	205/75 D15 225/75 D15			
Hitch	Adj. 2 5/16" Ball Coupler			
Jack	5,000 lb. Drop Leg			
Brakes	Not Available	Electric with Breakaway		
Weight	1,500 lbs			





### C500 Dump Trailer

60" x 8' Box











## **Utility Trailers**



	610	8012S	8012T	8014	8016	8018	8020
Overall Length	14'	16'	16'	18'	20'	22'	24'
Overall Width	8' 1"			8'	4"		
Height	2' 7"			2'	9"		
Tires		'		205/75			
Axle Rating		,		3500 lb.	,	,	
Wheel Size		15"					
Coupler Size	2	2"	2 5/16"				
Weight	1,000	1250	1450	1650	1900	2000	2100
Bed Height	18"			1	9"	,	
Bed Width	6' 4"			6'	8"		
Bed Length	10'	12'	12'	14'	16'	18'	20'
Brakes	Opti	onal Standard, Both Axles					
GVW	29	99 7000					
Ramps		4' 8" or 6' (see Ramps & Spare Tire Section for details)					
Jacks	2K Top						



## **Utility Trailers**





5' Economy Ramp for Easy Loading (Option)



**Structural Angle Iron Frame (Standard)** 







## D10 Dump Trailer 74" x 10' Box Deckover Dump



GVWR	10,000 lb
Bed Length	10'
Bed Width	74"
Bed Height	34" Off Ground
Axles	(2) Dexter 6K 6 Bolt Straight Axles
Suspension	Slipper Leaf Springs
Wheels	6 Bolt 15"
Tires	225/75 D15
Hitch	Adj. 2 5/16" Ball Coupler
Jack	7,000 lb. Drop Leg
Brakes	Standard- Both Axles
Weight	2,600 lbs

Made with



### D10 Dump Trailer

74" x 10' Box Deckover Dump









ATR86
Ag Dump Trailer




	ATR86	ATR86HW			
Inside Bed Width	57-1/2"				
Inside Bed Length	8'				
Overall Width	62"				
Platform Height	34"				
Axles	Spindle and AG Hub	(1) Dexter 5,200lb 6 Bolt Axle			
Suspension	None	Leaf Spring			
Tires	11L x 15 8 Play Tires on 15 x 8 x 6 bolt	225/75 D15			
Hitch	Welded Clevis Coupler	Adjustable 2-5/16" Ball Coupler			
Jack	2,000lb Flip Up Side Wind Jack				
Brakes	Not Available	Electric with Break Away			
Lights	None	Complete LED Lights			
Hydraulics	Tractor Remotes, Power Up & Down	Self Contained, Power Up Only			
Toolbox	None	Lockable Toolbox			
Weight	1,275 LB				







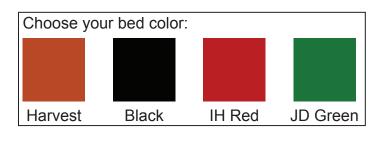







### Car Hauler



#### TRCH18

#### TRCH20

Overall Width	101-5/8"						
Deck Width	83"						
Deck Length	16' Flat + 2' Boarded Tail	ail 18' Flate + 2' Boarded Tail					
Deck Height	21"						
Main Frame	5" x 6.7 lb Structural Channel						
Fender	Removable Fenders (Standard)						
Ramps	6' Slide-In Ladder Ramps (Standard)						
Axles	(2) Dexter 3.5K	(2) Dexter 5K					
Suspension	Slipper Leaf Springs						
Wheels	5 Bolt 15"	6 Bolt 15"					
Tires	205/75 D15	225/75 D15					
Hitch	Welded 2 5/16" Ball Coupler						
Jack	5K Top Wind Jack						
Brakes	Electric Brakes - Both Axles						
Weight	2,000 lbs 2,200 lbs						

Made with



## Spec List

Trailer Model	Deck/Bed Length	Deck Height	Deck Width	Main Frame	No. of Axles	Axle Sizes	Std. Tire Sizes	
Skidsteer								
1014SST	14' 16' 18' or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 or 235/80 - R16 235/80 R17.5	
1016SST	14' 16' 18 or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 or 235/80 - R16 235/80 R17.5	
1018SST	14' 16' 18 or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 or 235/80 - R16 235/80 R17.5	
1020SST	14' 16' 18 or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 or 235/80 - R16 235/80 R17.5	
Tilt								
T-200	14' + 3' Beaver Tail (All Flat and Level Deck Optional)	19 1/2"	81 3/4"	7" x 9.8lb Structur- al Channel	2	6,000, 7,000 8,000	225/75 R15, 235/85 R16, 235/75 R17.5 LRH	
T-100	18' Full Deck Hydraulic Tilt	19 1/2"	81 3/4"	7" x 9.8lb Structur- al Channel	2	6,000, 7,000 8,000	225/75 R15, 235/85 R16, 235/75 R17.5 LRH	
				Deckover				
Standard Duty	14' (+3' with beaver tail optional)	28"	91"	5"x2"x1.88" Rect- angular Tube	2	3,500, 5,000	205/75 or 225/75	
Heavy Duty	Available in 16' 18' & 20' ( Plus 4' Tail )	30"-33"	96"	7" x 9.8lb Structur- al Channel	2	6,000, 7,000 8,000	225/75 or 235/80-R16	
Commercial Duty	18' 20' 22' & 24' ( Plus 5' Tail )	32"	96"	10" x 15.3lb Struc- tural Channel	2	7,000, 8,000, 10,000	235/80 - R17.5	
				Dump				
C-2500	12' or 14'	22"	78"	N/A	2	6,000, 7,000	225/75 R15 - 235/80 R16 - 235/80 R16	
C-1500	10'	26"	74"	5" x 6.7 lb Struc- tural Channel	2	6,000	225/75 R15	
C-500	8'	24"	62"	7" x 9.8 lb Struc- tural Channel	1	3,500, 5,200	205/75 D15, 225/75 R15	
				Utility				
510	10'	18"	64"	N/A	N/A	3,500	205/75 D15	
610	10'	18"	80"	N/A	N/A	3,500	205/75 D15	
8012S	12'	19"	80"	N/A	N/A	3,500	205/75 D15	
8012T	12'	19"	80"	N/A	N/A	3,500	205/75 D15	
8014T	14'	19"	80"	N/A	N/A	3,500	205/75 D15	
8016T	16'	19"	80"	N/A	N/A	3,500	205/75 D15	
8018T	18'	19"	80"	N/A	N/A	3,500	205/75 D15	
8020T	20'	19"	80"	N/A	N/A	3,500	205/75 D15	
				ther Dump	_			
D-10	10'	34"	74"	N/A	2	6,000	225/75 R15	
ATR-86	11.8'	34"	62"	N/A	1	N/A	11L x 15 8 Ply, 225/75 R15	
	T			ar Hauler				
TRCH18	16' Flat + 2' Boarded Tail	23 1/2"	83"	5" x 6.7lb Structur- al Channel	2	3,500	205/75 D15	
TRCH20	18' Flat + 2' Boarded Tail	23 1/2"	83"	5" x 6.7lb Structur- al Channel	2	5,000	225/75 R15	
	Gooseneck							
Heavy Duty Deckover	Available in 16' 18' & 20' ( Plus 4' Tail )	31"	96"	7" x 9.8lb Structur- al Channel	2	6,000, 7,000 8,000	225/75R-15 LR "D" 2,540 lbs. load cap	
Commercial Deckover	18' 20' 22' & 24' ( Plus 5' Tail )	32"	96"	10" x 15.3lb Struc- tural Channel	2	7,000, 8,000, 10,000	235/80 R16 or 235/75 R17.5 LRJ	
C-2500	12' or 14'	22"	78"	N/A	2	6,000, 7,000	225/75 R15 - 235/80 R16 - 235/80 R16	















### Contact Us

Pequea Machine, Inc. 200 Jayln Drive

New Holland, PA 17557

Monday - Friday: 8:00 - 5:00

(P) 717-354-4343

(F) 717-354-8843















NOTICE: All units are F.O.B. New Holland, PA.

Pequea Machine reserves the right to change specifications and prices without notice.

Pequea Machine, Inc. • A Skibo Company 200 Jalyn Drive • New Holland, PA 17557 Phone 717.354.4343 • Fax 717.354.8843 www.pequea.com