


PEQUEA

A SKIBO COMPANY


TRAILERS



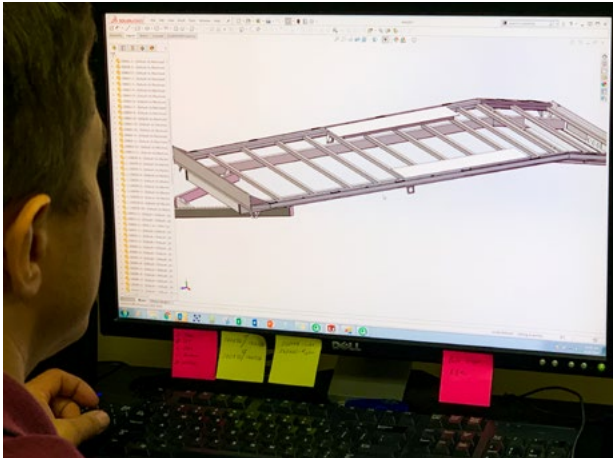

Design

Engineered from the axles up for strength, durability, and simplicity. Pequea trailers are designed to work as hard as you do. Built with the professional user in mind Pequea trailers can stand up to the rigors of the jobsite and last for the long haul.

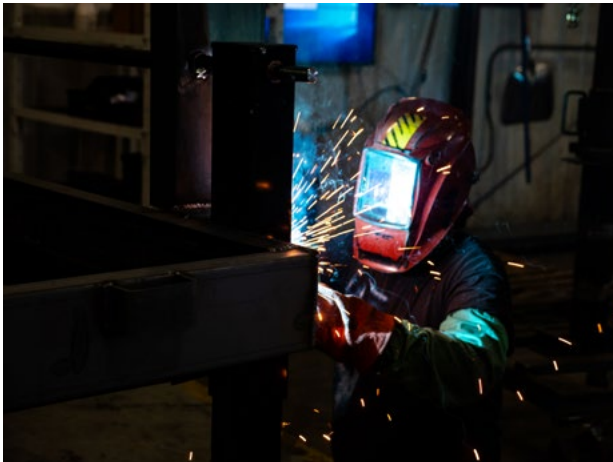

Construction

Our welders and machinists are proud of their work. Pequea trailers are made from fully welded structural steel, assembled and welded in fixtures and jigs for repeatable quality. Using the best components from axles to couplers we know a trailer is only as strong as its weakest link.



Detail

Finished to endure life on the road. Our paint process includes: Cleaning, etching, dry oven, epoxy priming, two component urethane top coat, and flash oven. Wire harnesses are sealed and modular using LED lights. Lumber for decking as well as any other components used are chosen for their durability and quality.

Contents

Skidsteer Trailers  Page 4	T200 Tilt Trailer  Page 6	T100 Tilt Trailer  Page 8
Standard Duty Deckovers  Page 10	Heavy Duty Deckovers  Page 12	Commercial Duty Deckovers  Page 14
C2500 Dump Trailer  Page 16	C1500 Dump Trailer  Page 18	C500 Dump Trailer  Page 20
Utility Trailers  Page 22	D10 Dump Trailer  Page 24	ATR86 Ag Dump Trailer  Page 26
Car Hauler  Page 28		

Available in 14', 16', 18' and 20' Deck Lengths



10,000lb GVWR

12,000 GVWR to 14,000 GVWR

16,000 GVWR

Overall Width	102"		
Deck Width	79"		
Deck Length	Available in 14', 16', 18', 20'		
Deck Height	19.5"		
Overall Height	32"		
Axles	(2) 6K 6 Bolt	(2) 7K 8 Bolt	(2) 8K 8 Bolt
Suspension	Slipper Leaf Springs		
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 17.5"
Tires	225/75 R15	235/80 R16	235/75 R17.5 LRH
Hitch	Adj. 2 5/16" Ball Coupler (Optional Pintle)		
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg	
Brakes	Standard- Both Axles		
Weight	14' = 2,200 lbs (Add 100 lbs for every additional foot of deck)		

Made with



7" Channel Skidsteer Trailers



10° Loading Angle (wih 6' Ramps)



LED Lights (Standard on all Pequea Trailer)



10K Drop Leg Jack
Standard with any GVWR Upgrade




81-3/4" Deck Width



D-Rings (Option)
Standard on 16,000 GVWR Model



	10,000lb GVWR	12,000 GVWR to 14,000 GVWR	16,000lb GVWR
Overall Width	102"		
Deck Width	80"		
Deck Length	4' Stationary Deck + 16' Tilting Deck		
Deck Height	19-1/2"		
Main Frame	7" x 9.8 lb Structural Channel		
Axles	(2) 6K 6 Bolt	(2) 7K 8 Bolt	(2) 8K 8 Bolt
Suspension	Slipper Leaf Springs		
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 17.5"
Tires	225/75 R15	235/80 R16	235/75 R17.5 LRH
Hitch	Adj. 2 5/16" Ball Coupler		
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg	
Brakes	Standard- Both Axles		
Weight	3,600 lbs		

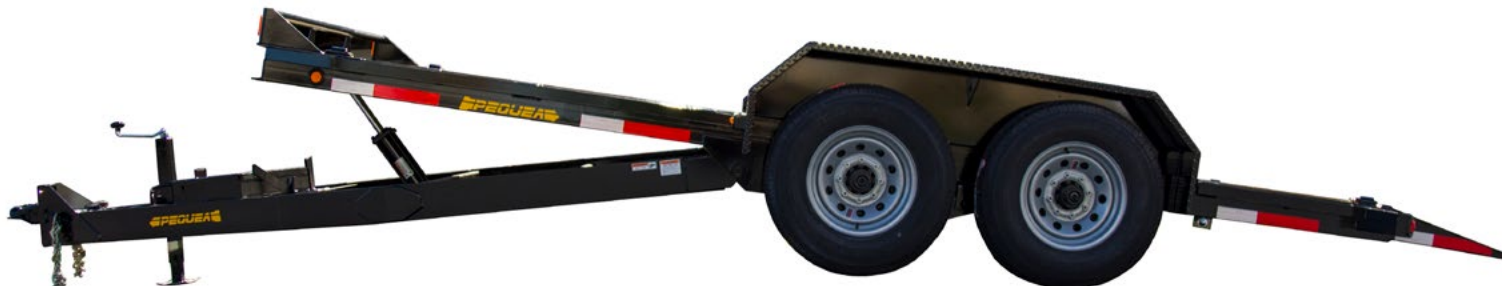

Made with




T200 Tilt Trailer

4' Stationary + 16' Gravity Tilt Deck



Simple Latching Mechanism

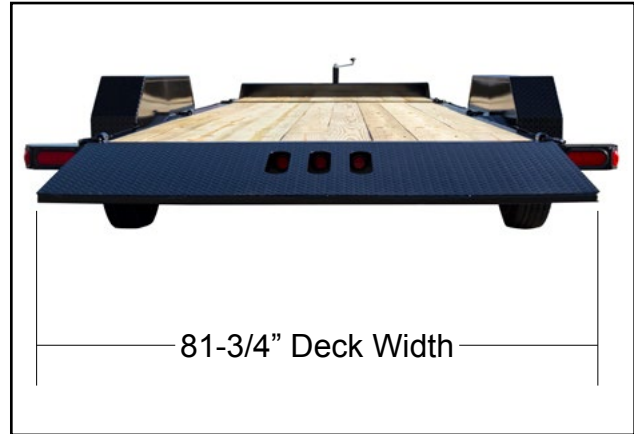

81-3/4" Deck Width



Diamond Plate Knife Edged Tail



(6) D-Rings Standard



Hydraulic Cushioned Gravity Tilt
(No Power Required)



4' Stationary Deck + 16' Tilt



	10,000lb GVWR	12,000 GVWR to 14,000 GVWR	16,000 GVWR
Overall Width	102"		
Deck Width	80"		
Deck Length	18' Full Deck Hydraulic Tilt		
Deck Height	19-1/2"		
Main Frame	7" x 9.8 lb Structural Channel		
Axles	(2) 6K 6 Bolt	(2) 7k 8 Bolt	(2) 8K 8 Bolt
Suspension	Slipper Leaf Springs		
Wheels	6 Bolt 15"	8 Bolt 16"	8 Bolt 17.5"
Tires	225/75 R15	235/80 R16	235/75 R17.5 LRH
Hitch	Adj. 2 5/16" Ball Coupler		
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg	
Brakes	Standard- Both Axles		
Weight	3,600 lbs		



T100 Tilt Trailer

7" Channel Main Frame



Toolbox with Hydraulic Power Unit



Hydraulic Tilt



Diamond Plate Tail



(6) D-Rings Standard



Front Tie Down Rail



Available with 14', 16', and 18' Decks (+3' Tail)



30" Deck Height

7,000lb GVWR

10,000 GVWR

Overall Width	96"	
Deck Width	91"	
Deck Length	14' + 3' Beaver Tail (All Flat Deck Optional)	
Deck Height	30"	31"
Main Frame	5" x 2" x .188" Rectangular Tube	
Axles	(2) 3.5K 5 Bolt	(2) 5K 6 Bolt
Suspension	Slipper Leaf Springs	
Wheels	5 Bolt 15"	6 Bolt 15"
Tires	205/75 R15	225/75 R15
Hitch	Adj. 2 5/16" Ball Coupler	
Jack	7,000 lb. Drop Leg	
Brakes	Standard Electric Brakes on Both Axles	
Weight	14' = 1950 lbs (Add 75 lbs for every additional foot of deck)	

Made with



Formerly known as 716
**Standard Duty
Deckover**
5" Tube Main Frame



3' Boarded Tail



Heavy Duty Diamond Plate Fenders



5" x 2" x .188" Tubular Frame



LED Lights (Standard on all Pequea Trailers)

Made with





10,000lb GVWR

12,000 GVWR to 14,000 GVWR

Overall Width	101"	
Deck Width	96"	
Deck Length	Available in 16', 18', 20' (Plus 4' Tail)	
Tail	Available with Boarded Tail, Adjustable Tail, All Flat Extension	
Deck Height	31"	
Main Frame	7" x 9.8 lb Structural Channel	
Axles	(2) 6K 6 Bolt	(2) 7K 8 Bolt
Suspension	Slipper Leaf Springs	
Wheels	6 Bolt 15"	8 Bolt 16"
Tires	225/75 R15	235/80 R16
Hitch	Adj. 2 5/16" Ball Coupler	
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg
Brakes	Standard- Both Axles	
Weight	16' = 2,950 lbs (Add 75 lbs for every additional foot of deck)	

Made with



Formerly known as 1018
**Heavy Duty
Deckover**
7" Channel Main Frame



4' Boarded Tail (Standard)



Strongest Gooseneck in the Industry



4' Adjustable Beavertail with 5' Slide-In Ramps (Optional)



**Adjustable Beavertail
with Slide-In Ramps
(Optional)**



	14,000lb GVWR	16,000 GVWR	20,000 GVWR
Overall Width	101"		
Deck Width	96"		
Deck Length	Available in 18', 20', 22', and 24' (Plus 5' Tail)		
Tail	Available with Boarded Tail, Adjustable Tail, All Flat Extension		
Deck Height	32"		
Main Frame	10" x 15.3 lb Structural Channel		
Axles	(2) 7K 8 Bolt	(2) 8K 8 Bolt	(2) 10K 8 Bolt
Suspension	Slipper Leaf Springs (Torsion Optional)		
Wheels	8 Bolt 16"	8 Bolt 17.5"	
Tires	235/80 R16	235/75 R17.5 LRJ	
Hitch	Adj. 2 5/16" Ball Coupler		
Jack	10,000 lb. Drop Leg		
Brakes	Standard- Both Axles		
Weight	18' = 3,840 lbs (Add 80 lbs for each additional foot of deck)		

Formerly known as I-10
**Commercial Duty
Deckover**
10" Channel Main Frame



Strongest Gooseneck in the Industry
8" x 3" x 1/4" Structural Tubing



Hydraulic Beavertail
(Option)



10,000lb GVWR

12,000 GVWR to 14,000 GVWR

Bed Length	12' or 14'	
Bed Width	79.25"	
Bed Height	22" Off Ground	
Main Frame	7" x 9.8 lb Structural Channel	
Axles	(2) 6K 6 Bolt	(2) 7K 8 Bolt
Suspension	Slipper Leaf Springs	
Wheels	6 Bolt 15"	8 Bolt 16"
Tires	225/75 R15	235/80 R16
Hitch	Adj. 2 5/16" Ball Coupler	
Jack	7,000 lb. Drop Leg	10,000 lb. Drop Leg
Brakes	Standard- Both Axles	
Weight	12' Bed = 4,100 lbs 14' Bed = 4,500 lbs	

C2500 Dump Trailer

7" Channel Main Frame



Slide-In Ladder Ramps (Standard)



Slide-In Ladder Ramps (Standard)



Barn Door/Spread Dump Gate (Standard)



Barn Door/Spread Dump Gate (Standard)



Side Extensions & Tarp Kit (Option)




Gooseneck Hitch (Option)



GVWR	10,000 lb
Bed Length	10'
Bed Width	74"
Bed Height	26" Off Ground
Main Frame	5" x 6.7 lb Structural Channel
Axles	(2) 6K 6 Bolt Straight Axles
Suspension	Slipper Leaf Springs
Wheels	6 Bolt 15"
Tires	225/75 R15
Hitch	Adj. 2 5/16" Ball Coupler
Jack	7,000 lb. Drop Leg
Brakes	Standard- Both Axles
Weight	2,850 lbs

C1500 Dump Trailer

74" x 10' Box

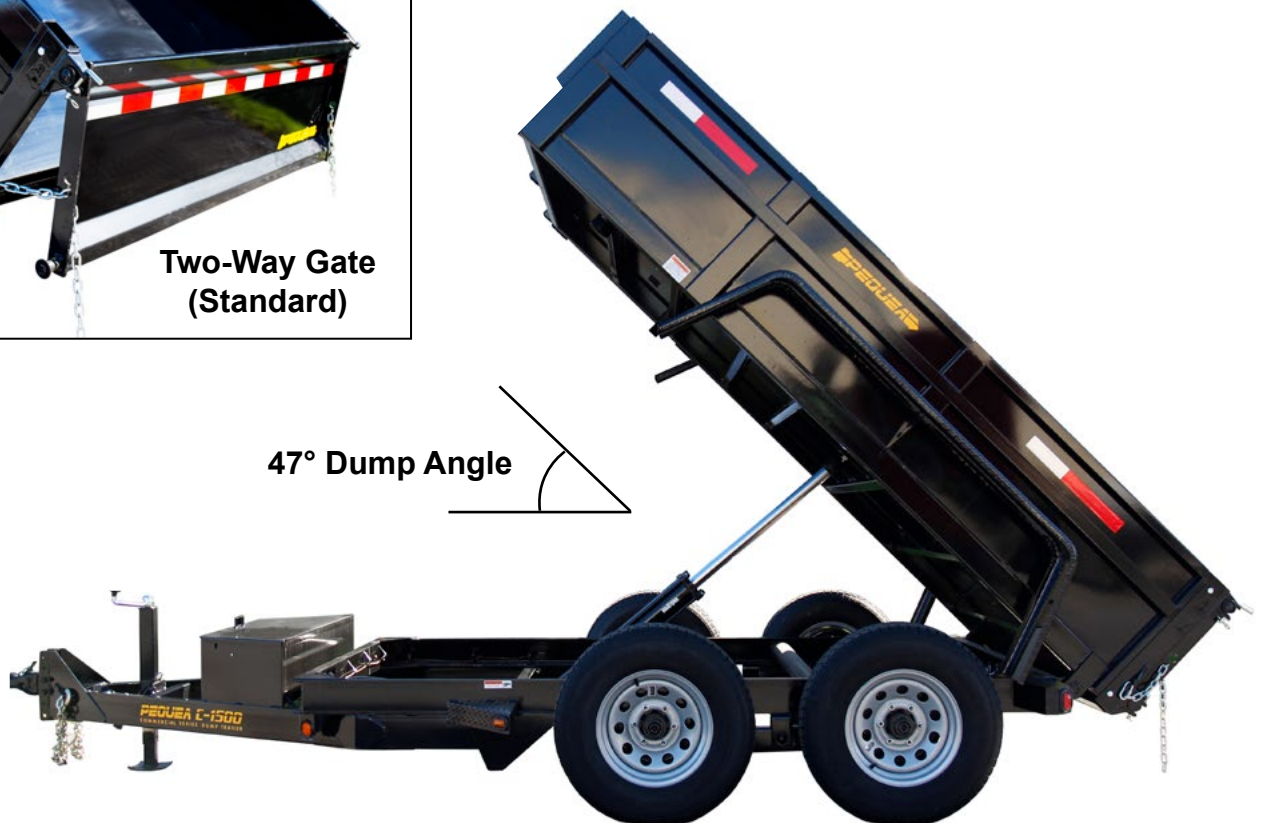



2,999 lb GVWR

5,000 lb GVWR

Bed Length	8'	
Bed Width	62"	
Bed Height	24"	
Main Frame	7" x 9.8 lb Structural Channel	
Axles	(1) 3.5K 5 Bolt	(1) 5.2K 5 Bolt
Suspension	Shackle Leaf Springs	
Wheels	5 Bolt 15"	6 Bolt 15"
Tires	205/75 R15	225/75 R15
Hitch	Adj. 2 5/16" Ball Coupler	
Jack	5,000 lb. Drop Leg	
Brakes	Not Available	Electric with Breakaway
Weight	1,400 lbs	

C500 Dump Trailer

60" x 8' Box



2-Way Gate (Standard)



	610	8012S	8012T	8014	8016	8018	8020
Overall Length	14'	16'	16'	18'	20'	22'	24'
Overall Width	8' 1"	8' 4"					
Height	2' 7"	2' 9"					
Tires	205/75 R15						
Axle Rating	3500 lb.						
Wheel Size	15"						
Coupler Size	2"		2 5/16"				
Weight	1,000 lbs	1200 lbs	1650 lbs	1750 lbs	1900 lbs	2000 lbs	2100 lbs
Bed Height	18"	19"					
Bed Width	6' 4"	6' 8"					
Bed Length	10'	12'	12'	14'	16'	18'	20'
Brakes	Optional		Standard, Both Axles				
GVW	2999 lbs		7000 lbs				
Ramps	4' 8" or 6' (see Ramps & Spare Tire Section for details)						
Jacks	2K Top Wind		5K Drop Leg				

Utility Trailers



5' Economy Ramp for Easy Loading (Option)




Structural Angle Iron Frame (Standard)



GVWR	10,000 lb
Bed Length	10'
Bed Width	74"
Bed Height	34" Off Ground
Axles	(2) 6K 6 Bolt Straight Axles
Suspension	Slipper Leaf Springs
Wheels	6 Bolt 15"
Tires	225/75 R15
Hitch	Adj. 2 5/16" Ball Coupler
Jack	7,000 lb. Drop Leg
Brakes	Standard- Both Axles
Weight	2,500 lbs

D10 Dump Trailer

74" x 10' Box Deckover Dump

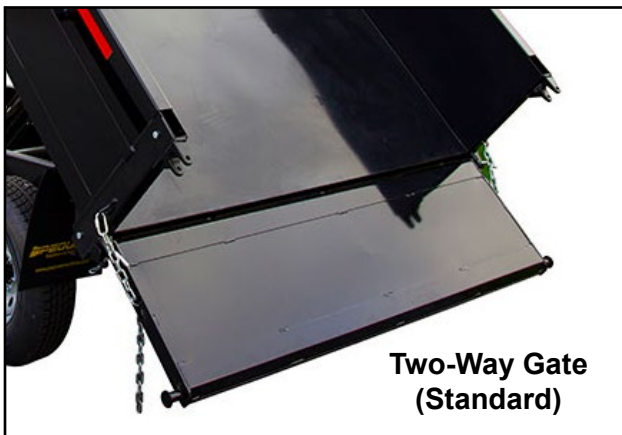

Two-Way Gate
(Standard)



47° Dump Angle



	ATR86	ATR86HW
Inside Bed Width	57-1/2"	
Inside Bed Length	8'	
Overall Width	62"	
Platform Height	34"	
Axles	Spindle and AG Hub	(1) 5,200lb 6 Bolt Axle
Suspension	None	Leaf Spring
Tires	11L x 15 8 Ply Tires on 15 x 8 x 6 bolt	225/75 R15
Hitch	Welded Clevis Coupler	Adjustable 2-5/16" Ball Coupler
Jack	2,000lb Flip Up Side Wind Jack	
Brakes	Not Available	Electric with Break Away
Lights	None	Complete LED Lights
Hydraulics	Tractor Remotes, Power Up & Down	Self Contained, Power Up Only
Toolbox	None	Lockable Toolbox
Weight	1,275 LB	

ATR86

Ag Dump Trailer



Highway Package

with



Two Way Tail Gate



Choose your bed color:



Harvest



Black



IH Red



JD Green



TRCH18

TRCH20

Overall Width	101"	
Deck Width	82"	
Deck Length	16' Flat + 2' Boarded Tail	18' Flat + 2' Boarded Tail
Deck Height	21"	
Main Frame	5" x 6.7 lb Structural Channel	
Fender	Removable Fenders (Standard)	
Ramps	6' Slide-In Ladder Ramps (Standard)	
Axles	(2) 3.5K	(2) 5K
Suspension	Slipper Leaf Springs	
Wheels	5 Bolt 15"	6 Bolt 15"
Tires	205/75 R15	225/75 R15
Hitch	Welded 2 5/16" Ball Coupler	
Jack	5K Top Wind Jack	
Brakes	Electric Brakes - Both Axles	
Weight	2,000 lbs	2,200 lbs

Spec List

Trailer Model	Deck/Bed Length	Deck Height	Deck Width	Main Frame	No. of Axles	Axle Sizes	Std. Tire Sizes
Skidsteer							
1014SST	14' 16' 18' or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
1016SST	14' 16' 18' or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
1018SST	14' 16' 18' or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
1020SST	14' 16' 18' or 20'	20"	81"	6" channel at 10.5 lbs	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
Tilt							
T-200	14' + 3' Beaver Tail (All Flat and Level Deck Optional)	19 1/2"	81 3/4"	7" x 9.8lb Structural Channel	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
T-100	18' Full Deck Hydraulic Tilt	19 1/2"	81 3/4"	7" x 9.8lb Structural Channel	2	6,000, 7,000 8,000	225/75 R15 235/80 R16 235/75 R17.5 LRH
Deckover							
Standard Duty	14' (+3' with beaver tail optional)	28"	91"	5"x2"x1.88" Rectangular Tube	2	3,500, 5,000	205/75 R15 or 225/75 R15
Heavy Duty	Available in 16' 18' & 20' (Plus 4' Tail)	30"-33"	96"	7" x 9.8lb Structural Channel	2	6,000, 7,000 8,000	225/75 R15 or 235/80 R16
Commercial Duty	18' 20' 22' & 24' (Plus 5' Tail)	32"	96"	10" x 15.3lb Structural Channel	2	7,000, 8,000, 10,000	235/80 R16 or 235/75 R17.5
Dump							
C-2500	12' or 14'	22"	79.25"	N/A	2	6,000, 7,000	225/75 R15 or 235/80 R16
C-1500	10'	26"	74"	5" x 6.7 lb Structural Channel	2	6,000	225/75 R15
C-500	8'	24"	62"	7" x 9.8 lb Structural Channel	1	3,500, 5,200	205/75 R15 or 225/75 R15
Utility							
510	10'	18"	64"	N/A	N/A	3,500	205/75 R15
610	10'	18"	80"	N/A	N/A	3,500	205/75 R15
8012S	12'	19"	80"	N/A	N/A	3,500	205/75 R15
8012T	12'	19"	80"	N/A	N/A	3,500	205/75 R15
8014T	14'	19"	80"	N/A	N/A	3,500	205/75 R15
8016T	16'	19"	80"	N/A	N/A	3,500	205/75 R15
8018T	18'	19"	80"	N/A	N/A	3,500	205/75 R15
8020T	20'	19"	80"	N/A	N/A	3,500	205/75 R15
Other Dump							
D-10	10'	34"	74"	N/A	2	6,000	225/75 R15
ATR-86	11.8'	34"	62"	N/A	1	N/A	11L x 15 8 Ply or 225/75 R15
Car Hauler							
TRCH18	16' Flat + 2' Boarded Tail	23 1/2"	83"	5" x 6.7lb Structural Channel	2	3,500	205/75 R15
TRCH20	18' Flat + 2' Boarded Tail	23 1/2"	83"	5" x 6.7lb Structural Channel	2	5,000	225/75 R15
Gooseneck							
Heavy Duty Deckover	Available in 16' 18' & 20' (Plus 4' Tail)	31"	96"	7" x 9.8lb Structural Channel	2	6,000, 7,000 8,000	225/75 R15 or 235/80 R16
Commercial Deckover	18' 20' 22' & 24' (Plus 5' Tail)	32"	96"	10" x 15.3lb Structural Channel	2	7,000, 8,000, 10,000	235/80 R16 or 235/75 R17.5
C-2500	12' or 14'	22"	78"	N/A	2	6,000, 7,000	225/75 R15 or 235/80 R16





Contact Us

Pequea Machine, Inc.
200 Jayln Drive

New Holland, PA 17557

Monday - Friday: 8:00 - 5:00

(P) 717-354-4343

(F) 717-354-8843





NOTICE: All units are F.O.B. New Holland, PA.
Pequea Machine reserves the right to change specifications and prices without notice.

Pequea Machine, Inc. • A Skibo Company
200 Jalyn Drive • New Holland, PA 17557
Phone 717.354.4343 • Fax 717.354.8843
www.pequea.com